


PD200

Dispatch Console

- Private Call
- Group Call
- All Call
- Message
- Location
- Report Statistics
- Record Storage
- Track Playback
- Repeater Status View
- PSTN Interconnection
- NAT Traversal
- Dispatch by Permission
- Numbering Management
- Geo-fencing

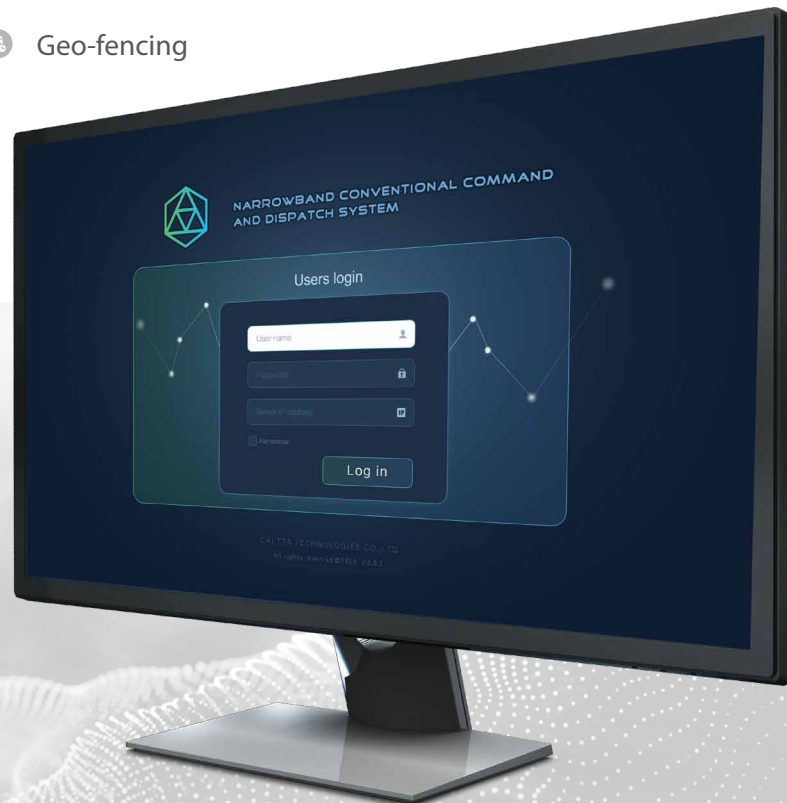

Highlights

- **Easy to Install**

The product adopts CS(Client and Server) architecture and hardware is rarely coupled, which makes deployment easily.

- **Easy to Extend**

Support the standard AIS interface, convenient for the customized development.

- **Best Performance**

Support high-capacity dispatch, support multiple paths of concurrent call and record.

- **Rich Functions**

Support the basic functions, such as private call, group call, location, text message, record, etc. Support the advanced functions, such as interconnection with PSTN, Geo-fencing, report statistics, dispatch by permission, etc.

Specifications

Configuration Requirement of Hardware

Desktop	CPU	2GHz
	Memory	8G
	Hard Disk	100GB
	Operation System	64 bit windows operation system

Performance

Max. User Number	800
Max. Group Number	128
Max. Concurrent Call Number	32
Max. Concurrent Record Number	32
Supported Paths to PSTN/PABX	30/1×E1
Call Time Delay	≤300ms
Max. Dispatch Console Client Number	8
Max. Repeater Number	64



Address: ZTE Industry Park, Xili, Nanshan District, Shenzhen, China

Tel: +86-755-26774767 Website: www.caltta.com Postcode: 518055

Privacy statement: As a device supplier and solution provider, Caltta complies with applicable laws and regulations when processing personal data, and adopts anonymization and data encryption technologies and necessary security management measures to ensure the security of personal data.